


SAFE ALERT™

LP Gas & Carbon Monoxide Alarm

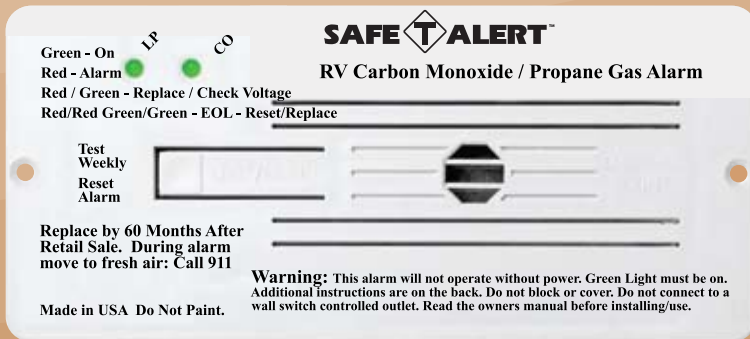

Model 35-742 Dual Alarm

Available in White, Almond, Brown and Black



- Meets 5/1/2011 requirements set by RVIA for CO alarms and Propane Detectors.
- Test/Reset Button - Mute alarm during ventilation. Tests both alarms functions with one touch. No dangerous gas required.
- Both alarms are fully operational during mute cycle and will re-alarm if hazardous conditions recur.
- Both sensors continue to work during an alarm.
- 12 Volt - Hard Wired Model prevents accidental disconnection.
- UL listed for Recreational Vehicles and Unconditioned Areas for both Carbon Monoxide and Propane.

Fits Most Cut Outs for Flush Mount
CCI CONTROLS
LP Gas Leak Detectors
Including Fleetwood & Winnnebago's

35 Series Dual Carbon Monoxide & Propane Gas Alarm Specifications

Dual UL Listing Propane - UL 1484 RV Gas Detectors

UL Listing Carbon Monoxide UL 2034 RV Carbon Monoxide Alarms

CSA Listed

Supply and Current Draw 12 vDC 108 mA @ 12 vDC

Operational Voltage: 12 Volt +/- 15% - Low voltage power warning alarm @ 7 volts.

Case Size - 6.375"W x 2.875"H x 1.25"D - Fits Safe-T-Alert Model 30-442 Cut Out.

Call for more information about the new **35 Series Family of Dual Alarms**

Call (800) 383-0269

www.safe-t-alert.com